

Personal Noise Dosimeter NB-14

Workplace Noise Measurements for Industrial Safety and Health

The NB-14, personal noise dosimeter, measures noise exposure for an individual working in a noisy workplace. Dedicated software rapidly processes measurement data, displays graphs, and generate reports. Measuring and managing noise exposure for individual workers enables early detection and treatment of noise-induced hearing impairment, the adoption of personal hearing protection equipment such as earplugs and earmuffs, and the introduction of effective measures to reduce noise at the source.

Measuring and Managing Noise Exposure for Individual Workers



Compact and lightweight

Easy operation

Automatic calibration

USB rechargeable

Simple report generation




Easy operation

Procedure of noise exposure measurement



Reviewing results with a mobile app

The app will be available on Google Play store.

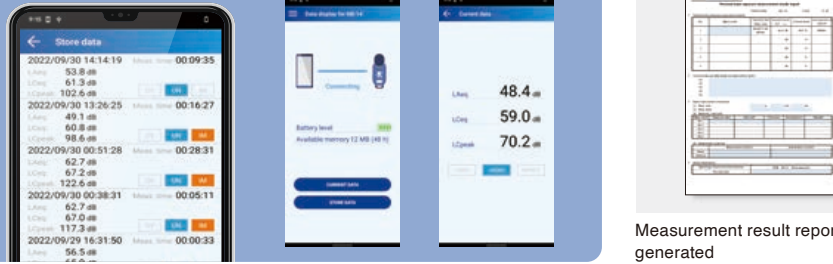

Data Management Software AS-05 Viewer

DOWNLOAD Available for free download from the RION website

The AS-05 Viewer Data Management Software reads data measured by the NB-14 Personal Noise Dosimeter into a computer for viewing measurement data and outputting reports.

Main functions

- Device management and settings
- Reading data from the NB-14
- Viewing measurement data (can be output in CSV format)
- Preparation of measurement results reports (can be output as Excel files)

Measurement results report

| Personal noise exposure measurement results report | | | | | |
|--|-------------|------------------------------|----------------------------------|----------------|------------------------------|
| Creation data 2022 yy 8 mm 25 dd | | | | | |
| No. | Object work | Start/end time Meas. time | Equivalent sound level L_{Aeq} | D (noise dose) | Permissible time of exposure |
| 1 | | 08:00/17:00 8h00m | 85.0 dB | 50.0 % | 8h00m |
| 2 | | | dB | % | |
| 3 | | | dB | % | |

Specifications NB-14

| | | |
|---|---|-----------------|
| Compliance | IEC 61252 : 2017, IEC 61672-1: 2013 class 2, JIS C 1509-1: 2017 Class 2, Enables measurements in compliance with ISO 9612. | |
| Measurement functions (simultaneous measurement and processing) | Equivalent-continuous A-weighted sound pressure level L_{Aeq} Equivalent-continuous C-weighted sound pressure level L_{Ceq} C-weighted peak sound level L_{Cpeak} Dose as percentage of permissible noise level exposure limit (A-weighted sound pressure level) | |
| Microphone | Measurement microphone (representative sensitivity: -33 dB) | |
| Store cycle | 1 s | |
| Sound level range of measurement | Equivalent-continuous A-weighted sound pressure level | 58 dB to 143 dB |
| | Equivalent-continuous C-weighted sound pressure level | 58 dB to 143 dB |
| | C-weighted peak sound level | 75 dB to 146 dB |
| Frequency range of measurement | 20 Hz to 8 kHz | |
| Display | Power status, measurement status, overload/under range detection,* and noise exposure displayed with LED illumination. * Shock detection function: When the device detects a shock exceeding the preset threshold, the LED will illuminate, and the shock vibration event will be recorded to internal memory because such shock vibrations can influence measurement results. | |

| | |
|--------------------------------------|--|
| Internal memory | Stores data for approximately 48 hours of measurement. |
| Power source | Rechargeable lithium ion battery (secondary battery) Continuous operating time: ≥ 12 hours |
| Operating temperature/humidity range | Temperature: -10 °C to 50 °C Humidity: 10 % to 90 % RH (no condensation) |
| Size and weight | 85 (H) x 43 (W) x 22 (D) mm, Approx. 85 g (excluding attachment holder) |
| Dustproof and waterproof performance | IP54 (except microphone) |
| Accessories | Dedicated USB cable* Dedicated windscreen Alligator clip holder * Allows settings for the NB-14 to be made from a computer and transfers measurement data to the computer. The USB cable has an NB-14-dedicated connector on one end and a USB Type A terminal on the other end. A separate battery recharger (commercially available product) is required to recharge the NB-14. |
| Options | Sound calibrator (NC-75) |

Related products

The NC-75 can be used for pre- and post-measurement calibration. Use it for day-to-day management of the NB-14.

Sound Calibrator NC-75



- Compact and lightweight
- High precision
- IEC 60942 Annex B

Ideal for working environment measurements at both outdoor and indoor worksites and for noise measurements of noise sources and workplace noise. Complies with IEC 60942 Annex B.

Sound Level Meter NL-27



- Ultra compact
- Ultra lightweight
- High performance



JCSS
JCSS 0197

RION CO., LTD. is recognized by the JCSS which uses ISO/IEC 17025 as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Accreditation Cooperation (APAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality Assurance Section of RION CO., LTD. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.

* Windows is a trademark of Microsoft Corporation. * Specifications subject to change without notice.

Distributed by:

RION CO., LTD.
<https://rion-sv.com/>

3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan
Tel: +81-42-359-7888 Fax: +81-42-359-7442